

## Technical Data Sheet Instantbond™ 110

June 2008

Page 1 of 3

### Product Description

**Hernon**<sup>®</sup> **Instantbond**<sup>™</sup> **110** is a state-of-the-art, single component, solventless, room temperature curing cyanoacrylate adhesive that polymerizes rapidly when pressed into a thin film between parts. The presence of surface moisture commences the cure of the adhesive. **Instantbond**<sup>™</sup> **110** develops handling strength within seconds and full functional strength in a few hours. **Instantbond**<sup>™</sup> **110** can bond a wide variety of surfaces including thermoplastics, elastomers, ceramics, leather, cork, and paper, but is particularly suited for bonding metal substrates. Notwithstanding the superior bonding capability of **Instantbond**<sup>™</sup> **110**, it is NOT recommended for long-term glass to glass bonding applications.

### Typical Applications

#### **Bonding**

Rubber bumpers  
Permanent locking of plastic  
Fasteners  
Speaker components  
Shock mounts  
Gears to shaft  
Wiper blades  
Acrylic windows  
Name plates  
Catheters  
Honing stones  
Security collars  
O-rings  
insulation pads

#### **Fixturing**

Filter caps  
Jumper wires  
Heat sinks  
Gaskets  
Golf club parts  
Tennis racquet parts  
P.C. boards  
Wire tacking

#### **Potting**

Transistors  
Tamper proofing  
Adjustable components  
Fiberglass molds

### Product Benefits

- Rapid Cure - forms a strong bond at room temperature in less than a minute with contact pressure.
- Surfaces - will bond almost any combination of similar or dissimilar materials.
- Easy Use - single component feature, eliminates any mixing.

### Typical Properties (Uncured)

Property	Value
Chemical Type	Methyl cyanoacrylate
Appearance	Clear liquid
Viscosity @ 77°F (25°C), cP	100
Specific gravity	1.05
Flash point	See MSDS

### Typical Properties (Cured)

Cured 24 Hours @ 22°C

#### **Physical Properties**

Property	Value
Coefficient of thermal expansion, K <sup>-1</sup> , ASTM D696	100 × 10 <sup>-6</sup>
Coefficient of thermal conductivity, W/(m·K), ASTM C177	0.1
Temperature range, °C, (°F)	-55 to 82 (-65 to 180)
Gap Fill, mm (in.)	0.127 (0.005)

#### **Electrical Properties**

Property	Value
Dielectric Strength, kV/mm ASTM D149	25
Dielectric Constant @ 0.10 kHz ASTM D150	2.65 2.75 2.75
Dissipation Factor @ 0.10 kHz ASTM D150	< 0.02 < 0.02 < 0.02
Volume Resistivity, Ω·cm ASTM D257	10 × 10 <sup>15</sup>
Surface Resistivity, Ω ASTM D257	10 × 10 <sup>15</sup>

### Performance Requirements

**Instantbond**<sup>™</sup> **110** meets the requirements of MIL-A-40650C, Type I Class 2, and CID A-A-3097 Type I Class 2.

### Typical Curing Performance

#### **Cure Speed vs. Substrate**

The rate of cure will depend on the substrate used. The table below shows the fixture time achieved on different materials at 22°C / 50% relative humidity. Fixture time is defined as the time to develop a shear strength of 0.1 N/mm<sup>2</sup>.

Substrate	Fixture Time (seconds)
Steel	20 to 40
Aluminum	30 to 60
Zinc Dichromate	40 to 70
Neoprene	< 10
Nitrile Rubber	< 10
ABS	10 to 30
PVC	30 to 70
Polycarbonate	20 to 70
Phenolic	10 to 30

**Cure Speed vs. Bond Gap**


The rate of cure will depend on the bondline gap. Thin bond lines result in high cure speeds, increasing the bond gap will decrease the rate of cure.

**Cure Speed vs. Accelerator**

Where cure speed is unacceptably long due to large gaps, applying accelerator to the surface will improve cure speed. However, this can reduce ultimate strength of the bond and therefore testing is recommended to confirm effect.

**Cure Speed vs. Humidity**

The rate of cure will depend on the ambient relative humidity. The following graph shows the tensile strength developed with time on Buna N rubber at different levels of humidity.

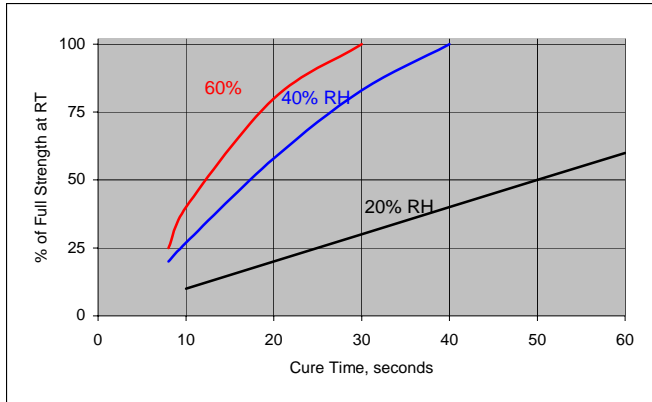

**Typical Cured Performance**

**Shear Strength**

Cured 24 Hours @ 22°C - tested according to ISO 4587

Substrate	Shear Strength N/mm <sup>2</sup> (psi)
Steel (grit blasted)	20.0 to 30.3 (2900 to 4400)
Aluminum (grit blasted)	15.2 to 22.1 (2200 to 3200)
Zinc Dichromate	4.1 to 12.1 (600 to 1750)
ABS	6.0 to 20.0 (870 to 2900)
PVC	6.0 to 20.0 (870 to 2900)
Polycarbonate	5.2 to 20.0 (750 to 2900)
Phenolic	5.2 to 15.2 (750 to 2200)
Neoprene	5.2 to 15.2 (750 to 2200)
Nitrile	5.2 to 15.2 (750 to 2200)

**Tensile Strength**

Tested according to ISO 6922


Substrate	Cure Time @ 22°C	Tensile Strength N/mm <sup>2</sup> (psi)
Buna-N	30 seconds	≥ 6.0 (≥ 870)
	24 hours	5.2 to 15.2 (750 to 2200)
Steel	24 hours	12.1 to 25.5 (1750 to 3700)

**Typical Environmental Resistance**

Cured for 1 week @ 22°C  
Shear Strength, ISO 4587  
Steel lap-shear specimens (grit blasted)


**Hot Strength**

Tested at temperature

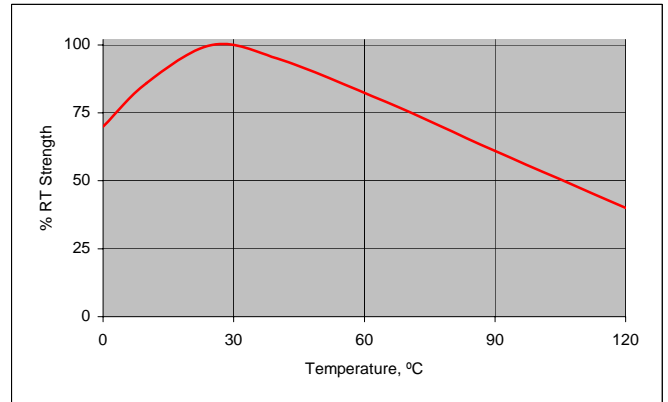

**Heat Aging**

Aged at temperature indicated and tested at 22°C

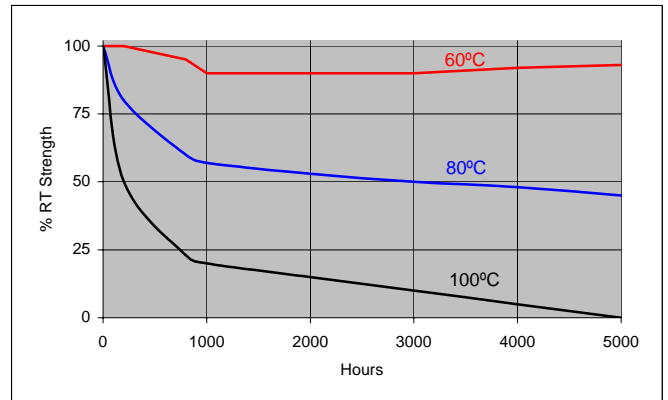

### Chemical/Solvent Resistance

Aged under condition indicated - Tested at 72°F (22°C).

Chemical/Solvent	Temp (°C)	% of Initial Strength		
		100h	500h	1000h
Motor Oil	40	100	100	100
Gasoline	22	95	95	95
Ethanol	22	100	100	100
Isopropanol	22	100	100	100
Freon TA	22	95	95	95
1,1,1 Trichloroethane	22	95	95	95
Heat / 95% RH	40	70	50	40

### General Information

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet (MSDS).

### Directions For Use

For best performance bond surfaces should be clean and free from grease. This product performs best in thin bond gaps (0.05 mm).

### Disassembly and Cleanup

Liquid Cyanoacrylate should not be wiped with rags or tissue. The fabric will cause polymerization and large quantities of adhesive will heat or cure causing smoke and strong irritating vapors. Always flood with excess water to clean up spill conditions.

### Storage

Cyanoacrylate adhesives must be stored under refrigeration at a temperature of 40°F ± 5°F for extended shelf life. Before opening, the containers must be warmed to room temperature, otherwise, water may condense into the bottle and cause hardening of the adhesive. To prevent contamination of unused adhesive, do not return product to its original container.

### Dispensing Equipment

Hernon® offers a complete line of semi and fully automated dispensing equipment. Contact Hernon® Sales for additional information.

These suggestions and data are based on information we believe to be reliable and accurate, but no guarantee of their accuracy is made. HERNON MANUFACTURING®, INC. shall not be liable for any damage, loss or injury, direct or consequential arising out of the use or the inability to use the product. In every case, we urge and recommend that purchasers, before using any product in full scale production, make their own tests to determine whether the product is of satisfactory quality and suitability for their operations, and the user assumes all risk and liability whatsoever, in connection therewith. Hernon's Quality Management System for the design and manufacture of high performance adhesives and sealants is registered to the ISO9001:2000 Quality Standard.