


Materials:	Temp. Range	
Nylon	-30°C	to 93°C
PTFE	-268°C	to 232°C
Hytrel®	-54°C	to 149°C
Urethane	-54°C	to 105°C

Product Description:

Modular bearings are used in both rod and piston applications. They act as a wear and load bearing surface to help extend the life of a U-cup. The standard material of modular bearings is a durable Nylon.

Modular bearings are available in custom sizes.

Part Numbers:

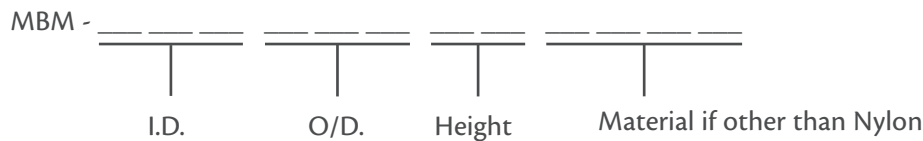

Example: MBM 40537 - Nylon Modular Bearing, 40.00 mm I.D. x 50.00 mm O.D. x 7.00 mm C/S