




Materials	Temp. Range		
Nitrile (NBR)	-40°C	to	120°C
Hydrogenated Nitrile (HNBR)	-40°C	to	160°C
Viton™/Fluorocarbon (FKM)	-26°C	to	204°C
Ethylene Propylene (EPDM)	-54°C	to	150°C
Chloroprene (CR)	-40°C	to	121°C
Silicone (VMQ)	-65°C	to	232°C



O-Ring



Square Cut Ring




Quad Ring

Cross - Sections (inches)		
0.063	0.250	0.625
0.093	0.275	0.687
0.103	0.312	0.750
0.125	0.375	0.872
0.139	0.437	1.000
0.188	0.500	
0.210	0.562	

Product Description

O-ring cord is excellent for large diameter static applications. Our O-ring cord is sold by the foot. Custom O-ring sizes can be manufactured through our in-house splice and vulcanizing service. For groove information refer to the O-ring section which begins on page 1.

Part Numbers:

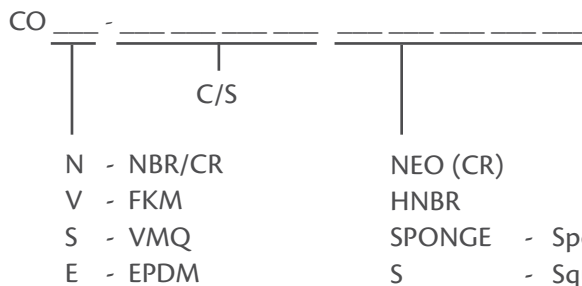


NEO (CR)

HNBR

SPONGE - Sponge Material

S - Square Cut

Quad Cord

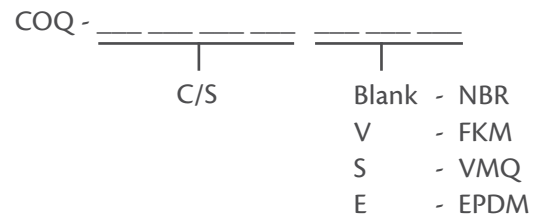

Example: COV 139S - Square Viton™ Cord, 0.139" C/S

Example: COQ 500 - Quad NBR Cord, 0.500" C/S