


# O-Ring Cord


O-Ring Cord



Materials	Temp. Range		
Nitrile	-40°C	to	120°C
Hydrogenated Nitrile	-40°C	to	160°C
Viton™/Fluorocarbon	-26°C	to	204°C
EPDM	-54°C	to	150°C
Neoprene	-40°C	to	121°C
Silicone	-65°C	to	232°C



O-Ring



Square Cut Ring




Quad Ring

Cross - Sections (inches)		
0.063	0.250	0.625
0.093	0.275	0.687
0.103	0.312	0.750
0.125	0.375	0.872
0.139	0.437	1.000
0.188	0.500	
0.210	0.562	


## Product Description

O-ring cord is excellent for large diameter static applications. Our O-ring cord is sold by the foot. Custom O-ring sizes can be manufactured through our in-house splice and vulcanizing service. For groove information refer to the O-ring section which begins on page 1.

## Part Numbers:

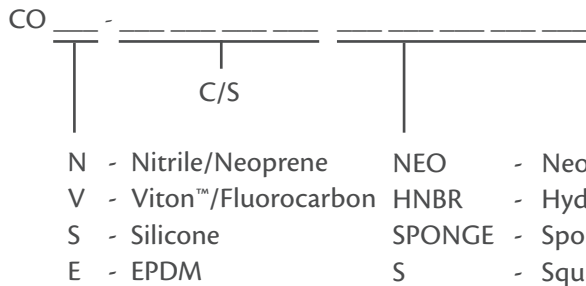

### Quad Cord

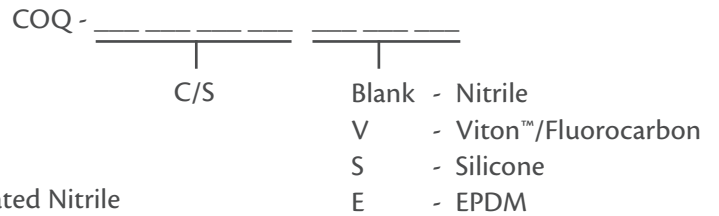

Example: COV 139S - Square Viton™ Cord, 0.139" C/S

Example: COQ 500 - Quad Nitrile Cord, 0.500" C/S