


# O-Ring Cord


O-Ring Cord



Materials	Temp. Range
Nitrile	-40°C to 120°C
Hydrogenated Nitrile	-40°C to 160°C
Viton™/Fluorocarbon	-26°C to 204°C
EPDM	-40°C to 150°C
Neoprene	-40°C to 121°C
Silicone	-65°C to 232°C



O-Ring




Square Cut Ring

Cross-Sections (mm)		
1.00	3.50	7.00
1.50	4.00	8.00
1.60	4.50	8.40
2.00	5.00	9.00
2.40	5.50	10.00
2.50	5.70	10.50
3.00	6.00	>10.50

## Product Description

O-ring cord is excellent for large diameter static applications. We sell O-ring cord by the foot. Custom O-ring sizes can be manufactured through our in-house splice and vulcanizing service.

## Part Numbers:

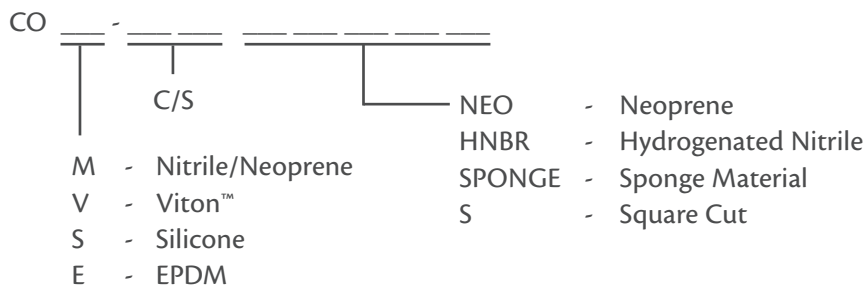

**Example:** COM 3S - Square Cut Nitrile Cord, 3.00 mm C/S